

# Snap Seam

Versatile 1.75" high standing seam with hidden snap-lock clips.



Snap Seam is built from the core for performance – from high-strength alloy core and multi-layer baked-on-paint, to snap-lock design and UL90 clips. Snap Seam has rugged 1.75" high ribs, enabling Snap Seam to be installed over open framing or solid deck structures.




Metal Roofing Manufacturer  
[bestbuymetalroof.com](http://bestbuymetalroof.com)

# Design & Size



We provide Snap Seam custom cut to the inch per specifications. Any length is available from 3' up to 45', or onsite to any length.

Snap Seam's design features 1.75" high snap-lock style ribs – standard width is 14" with additional options for 12", 16", or 18". Thickness options include 26 and 24 gauge as standard and 22 gauge optional.

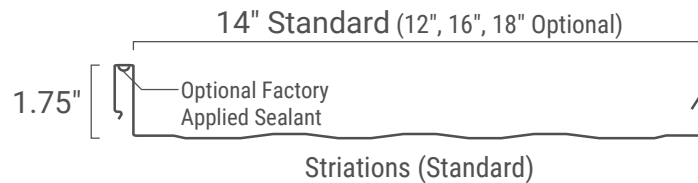

# Warranty & Finish



Painted Snap Seam carries a 50 year paint warranty, 50 year substrate warranty, and 30 year fade/chalk warranty. Unpainted Galvalume carries a 45 year warranty.

The painted option is a baked on enamel paint over primer and Galvalume. The non-painted Galvalume option is 45% zinc and 55% aluminum with a clear acrylic overcoat.





# Purpose & Use

Snap Seam is one of our most versatile standing seam systems. Whether you need it for a home, business, or commercial application; Snap Seam may fit the bill.

Snap Seam can be installed over solid decking on slopes as low as 1:12 and open framing on slopes as low as 3:12.

Taller ribs with optional factory applied sealant provide strength and lock out the weather.



## MINIMUM SLOPE

1:12 Solid Deck  
3:12 Open Deck



## SUBSTRATE

Solid Deck  
Open Deck



## HAIL RESISTANT

High Tensile Steel  
Class 4 Impact Resistance



## INTENT


Residential  
Commercial



## CATEGORY

Standing Seam  
Commercial Panels

# Inspiration

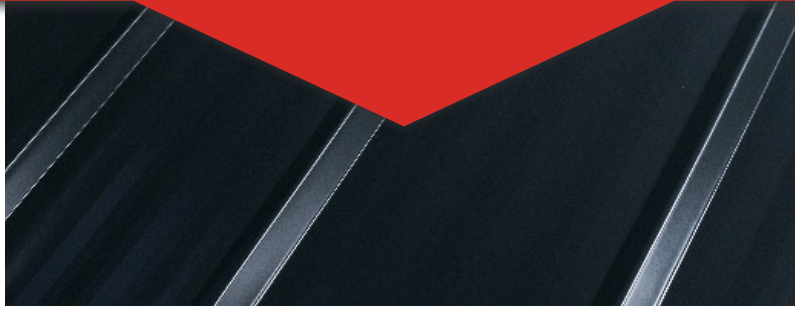





PEOPLE



MAKE



THE



DIFFERENCE